

# Raphael

## Raf Meter

### Multi Jet Water Meter

# RMM

DN15 – DN50



#### FEATURES:

- Dry type, Magnetic coupling
- Accuracy: acc. ISO4064 (2005) DN15-DN40 R80, DN50 R50
- Max. Pressure and temp.: MAP 16, MAT 50
- Optional Pulse Output via reed switch on request
- Leak detector



RAPHAEL Valves Industries (1975) LTD

Northern Industrial Zone, Or-Aqiva P.O. Box 555 Israel 30600. Certified Exporter No.510718331

Tel:972-4-6263555;Fax:972-4-6263558 E-mail:export@raphael.co.il [http:// www.raphael.co.il](http://www.raphael.co.il)




## Multi Jet Water Meter RMM

### TECHNICAL SPECIFICATIONS

#### Dimensions

DN	[mm] [inch]	15 ½	20 ¾	25 1	32 1¼	40 1½	50 2
Length L	[mm] *	165	190	260	260	245	300
Length with Connectors L1	[mm]	245	292	380	384	373	428
Height H	[mm]	111	111	116	116	170	170
Width B	[mm]	90	90	90	90	130	130
Weight With Connectors	[Kg]	1.3	1.5	2.2	2.8	4.3	6.5

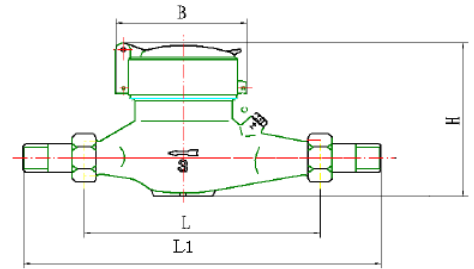


\* Other lengths are optional

#### Metrological Data


DN	[mm] [inch]	15 ½	20 ¾	25 1	32 1¼	40 1½	50 2
Q1-Min. Flowrate		31.3	50	78.8	125	200	500
Q2-Transitional Flowrate		50	80	126	200	320	800
Q3-Permanent Flowrate		2,500	4,000	6,300	10,000	16,000	25,000
Q4-Max. Flowrate		3,125	5,000	7,875	12,500	20,000	31,250

\* Flowrates units: Liter/hour

#### ACCURACY CURVE

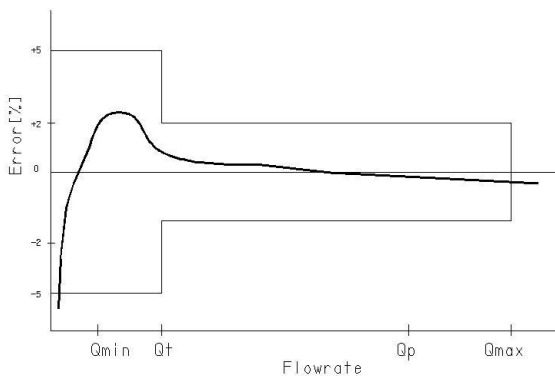

#### HEADLOSS CURVE

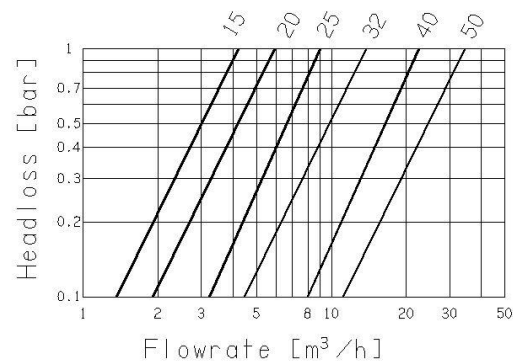

NOTE: The information is subject to changes without prior notice

RMM 08/10

